

# Technical Data Sheet


## Epilight™ 5396 Visible Dye

### DESCRIPTION

Suitable for coatings  
 Strong fluorescence  
 Stable in Polycarbonate

### PROPERTIES

Absorption maximum,  $\lambda$  max: 527 nm  
 Absorptivity in acetone:  $158 \text{ L g}^{-1} \text{ cm}^{-1}$   
 Appearance: red powder  
 Melting point: 243-245°C  
 Solubility in grams/100 grams of solvent:  
     MEK 10.1 grams  
     Xylene 0.0 grams  
     Cyclohexanone 7.6 gram

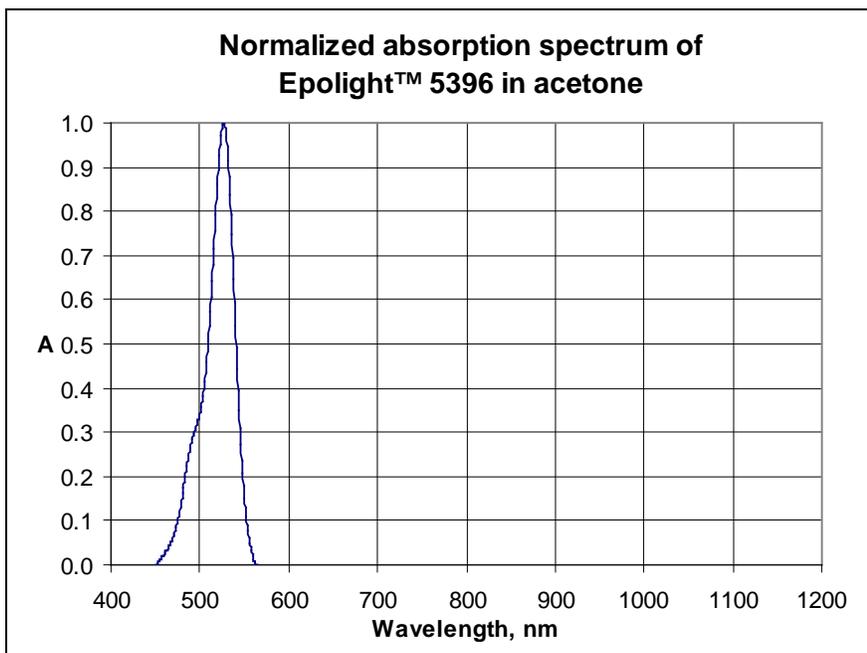

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.