

# Technical Data Sheet


## Epilight™ 5587 Near Infrared Dye

### DESCRIPTION

Suitable for coatings  
 Suitable for PVC lamination  
 Very high absorptivity  
 Not suitable for injection molding

### PROPERTIES

Absorption maximum,  $\lambda$  max: 815 nm  
 Absorptivity in acetone:  $296 \text{ L g}^{-1} \text{ cm}^{-1}$   
 Appearance: brown powder  
 Solubility in grams/100 grams of solvent:  
     MEK 4.0 grams  
     Xylene <0.1 gram  
     Cyclohexanone 3.5 grams

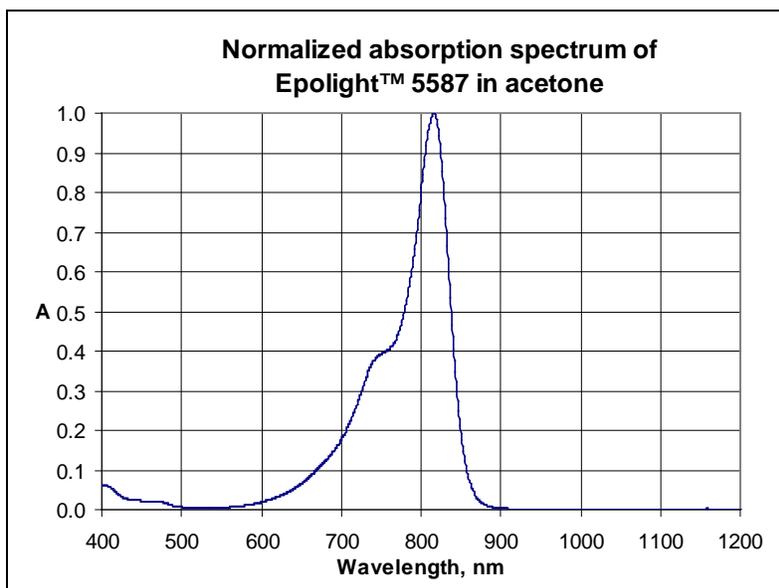

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.