

Technical Data Sheet

Epolight[™] 7276A visible opaque dye

DESCRIPTION

Suitable for thermoplastic compounding

Not suitable for coatings

Blocks light from 200-830 nm


Allows transmittance above 880 nm

Appearance: orange-brown powder

Can be formulated to provide these transmittance values:

- 5% at 830 nm
- 50% at 855 nm
- 80% at 880 nm

Transmittance spectrum of Epolight 7276A in polycarbonate

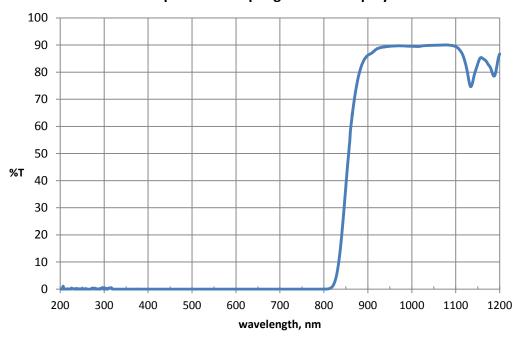

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.

© Epolin All Rights Reserved 06/17