



Technical Data Sheet

Luminate™ 7276B visible opaque compound

DESCRIPTION

Ready-to-mold thermoplastic

Blocks visible light from 200 to 750 nm


Allows IR transmittance above 795 nm

Appearance: black polycarbonate pellets

Target transmittance values

- 5% at 750 nm
- 50% at 774 nm
- 80% at 795 nm
- 85% at 805 nm

Transmittance spectrum of Luminate 7276B in polycarbonate (2.54mm)

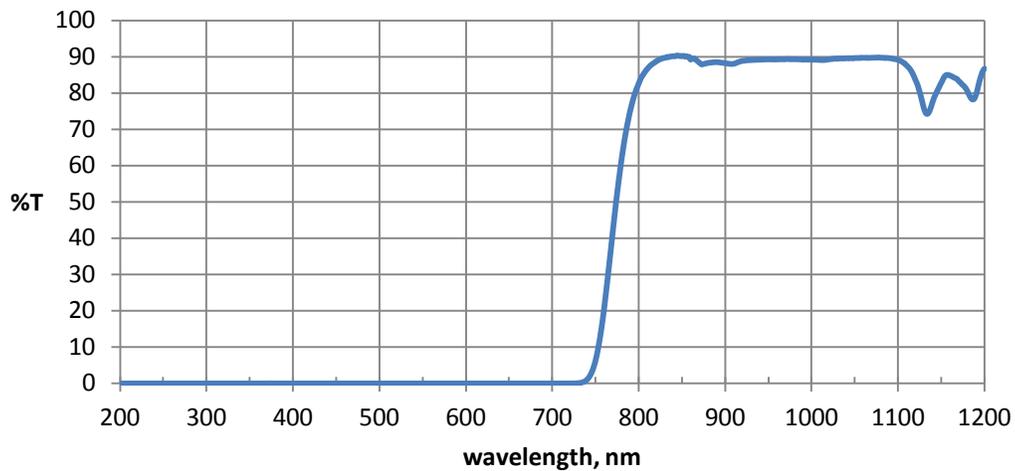

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.